

CAD-CUT® PREMIUM PLUS SUBLISTOP



001
white



005
cream
ca. Pant. 4655c



110
yellow
ca. Pant. 012c



185
light orange
ca. Pant. 1495c



200
red
ca. Pant. 186c



320
light blue
ca. Pant. 298c



380
turquoise
ca. Pant. 321c



422
light green
ca. Pant. 362c



730
grey
ca. 7543c



815
silver
ca. Pant. 877c



115
gold
ca. Pant. 871c

CAD-CUT® PREMIUM PLUS SUBLISTOP



POLYURETHANE FLEX MATERIAL WITH A SLIGHTLY ADHESIVE CARRIER.

This film provides a layer of Sublistop preventing any sublimation of the polyester colour. The material is very easy to weed, and will be suitable for several print proofs.



AVAILABLE IN

50 cm x 25 m rolls

RECOMMENDED FABRICS

- 100% polyester
- 100% sublimated polyester
- Polyester-cotton blends
- Polyester caps
- Polyester mesh

CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 2,5 mm for lettering and logos.

APPLICATION INSTRUCTIONS

- Temperature: 130°C
- Time: 10 sec.
- Pressure: medium
- (#4-6 on Hotronix®)
- Peel: cold

MULTI-COLOUR DESIGNS

Apply background for 3-5 seconds, peel carrier cold. Repeat for additional colours. Finish with final application of 18-20 seconds. Peel cold.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®

CARE INSTRUCTIONS

Mashine wash up to 40° C using mild detergent. Do not use bleach. Dry at normal dryer settings on household machines. Do not dry-clean. Can be directly ironed.


STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.

DETAILS



KEY

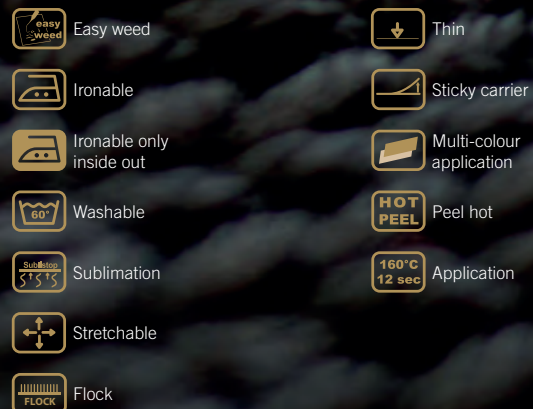

Allmost all materials can be combined with each other and are suited for a variety of fabrics. For further information please consult the product details online.

STAHL'S
EUROPE • AFRICA • MID EAST