

# CAD-CUT® SILICONE 200 & 500



**001**  
white



**200**  
red  
ca. Pant. 186c



**320**  
light blue  
ca. Pant. 2148c



**300**  
royal blue  
ca. Pant. 286c



**730**  
grey  
ca. Pant. 422c



**700**  
black



**400**  
green  
ca. Pant. 7727c



# CAD-CUT® SILICONE 200 & 500



## DURABLE SILICONE MATERIAL WITH A MATTE FINISH AND A SOFT TOUCH.

### Silicone 200

The material is 200 microns thick, and is perfect for designs to be cut with medium to large detail.

### Silicone 500

Is a similar material, but 500 microns thick. It has a matte finish, soft touch and is extremely durable. Fashion wear is enhanced by its unique 3D appearance. The material is a natural blocker, and is therefore suitable for use on sublimated polyester.



## AVAILABLE IN

50 cm x 25 m rolls

## RECOMMENDED FABRICS

- 100% cotton
- 100% polyester\*
- Polyester-cotton blends
- sublimated polyester

\* Test before application!

## CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 1.5 mm (1/16") for lettering and logos.

## APPLICATION INSTRUCTIONS

- Temperature: 150°C
- Time: 10 sec.
- Pressure: medium
- (#4-6 on Hotronix®)
- Peel: cold
- Reprint: 5 sec.

## MULTI-COLOUR DESIGNS

CAD-CUT® Silicone is not suitable for multi-layer applications.

## ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®

## CARE INSTRUCTIONS

Machine wash up to 60° C using mild detergent. Do not use bleach. Dry at normal dryer settings on household machines. Do not dry-clean. Can be directly ironed.


## STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.

## DETAILS



## KEY

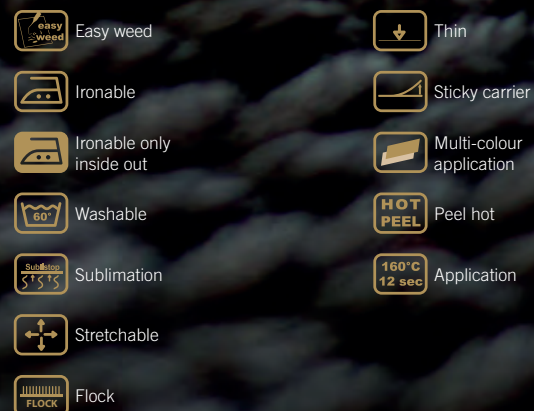

Allmost all materials can be combined with each other and are suited for a variety of fabrics. For further information please consult the product details online.

**STAHL'S**  
EUROPE • AFRICA • MID EAST