

CAD-CUT® SPORTSFILM



001
white



004
beige
ca. Pant. 4685c



005
cream
ca. Pant. 479c



100
lemon
ca. Pant. 7405c



110
yellow
ca. Pant. 012c



106
sunflower yellow
ca. Pant. 137c



185
light orange
ca. Pant. 1495c



180
orange
ca. Pant. 021c



210
signal red
ca. Pant. 185c



200
red
ca. Pant. 186c



270
burgundy
ca. Pant. 188c



255
pastel pink
ca. Pant. 2036c



252
pink
ca. Pant. 507c



250
fuchsia
ca. Pant. 2424c



285
pastel purple
ca. Pant. 2071c



280
purple
ca. Pant. 2096c



321
pastel blue
ca. Pant. 538c



320
light blue
ca. Pant. 298c



300
royal blue
ca. Pant. 286c



350
navy
ca. Pant. 532c



380
turquoise
ca. Pant. 7717c



420
pastel green
ca. Pant. 358c



421
apple green
ca. Pant. 368c



422
light green
ca. Pant. 362c



400
green
ca. Pant. 7727c



410
dark green
ca. Pant. 560c



430
olive
ca. Pant. 7763c



550
brown
ca. Pant. 7616c



730
grey
ca. Pant. 7543c



780
dark grey
ca. Pant. 419c



700
black



815
silver
ca. Pant. 877c



115
gold
ca. Pant. 871c



101
neon yellow



181
neon orange



241
neon pink



301
neon blue



401
neon green

CAD-CUT® SPORTSFILM



A CLASSIC AND DURABLE FILM, WITH A STICKY POLYESTER FILM CARRIER.

As there are so many colors available in the range, the material is perfect for multi-color designs. With a matte finish, and soft hand, and high opacity. Perfect for producing smaller designs. CAD-CUT® SportsFILM is a very lightweight polyurethane film available in a large range of colours enabling you to produce your own individual look. It is supplied on a self-adhesive polyester carrier, it gives excellent opacity and produces a matte finish. It is ideal for producing multi-colour designs with intricate detail.



AVAILABLE IN

50 cm x 25 m rolls

RECOMMENDED FABRICS

- 100% cotton
- 100% polyester*
- Polyester-cotton blends

*Test before application!

CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 1 mm for lettering and logos.

APPLICATION INSTRUCTIONS

- Temperature: 130°C / 150°C
- Time: 10 sec. / 5 sec.
- Pressure: medium
- (#4-8 on Hotronix®)
- Peel: hot

MULTI-COLOUR DESIGNS

Apply background for 3-5 seconds, peel carrier cold. Repeat for additional colours. Finish with final application of 13-25 seconds. Peel cold.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®

CARE INSTRUCTIONS

Machine wash up to 60° C using mild detergent. Do not use bleach. Dry at normal dryer settings on household machines. Do not dry-clean. Can be directly ironed.


STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.

DETAILS



KEY

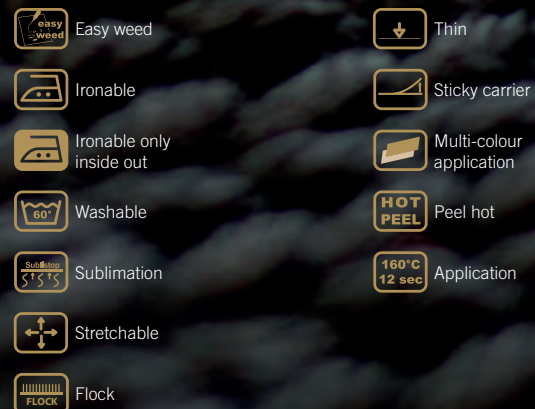

Allmost all materials can be combined with each other and are suited for a variety of fabrics. For further information please consult the product details online.

STAHL'S
EUROPE • AFRICA • MID EAST