


CWT 1736 Regular

PNEUMATIC FLATBED APPLICATOR AND WORKTABLE

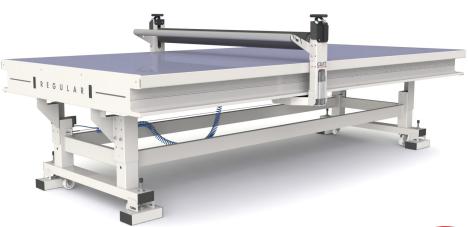

FACTS

PART NO	CWT1736-00
DESCRIPTION	CWT 1736 Regular
TABLE LENGTH	3640mm (11ft. 3in.)
TABLE WIDTH	1720mm (5ft. 8in.)
LENGTH OF WORKING AREA	3200mm (10ft. 6in.)
WIDTH OF WORKING AREA/ROLLER WIDTH	1650mm (5ft. 5in.)
OVERALL WIDTH	2045mm (6ft. 9in.)
MAX. THICKNESS OF SUBSTRATE	0-70mm (0-2.7in.)
WORK HEIGHT	744-950mm (2ft.5in 3ft.1in.)
WORK HEIGHT ADJUSTEMENT*	Manual - 4 steps
BED SURFACE	Safety glass + Cutting mat
POWER SUPPLY**	230V/50Hz (10A) or 120V/60Hz (15A)
REQUIRED AIR SUPPLY	6-8bar (87-116psi)
NET WEIGHT	480kg (1059lbs)
GROSS WEIGHT	635kg (1400lbs)
PACKING DIMENSIONS	3800 x 560 x 2100mm (12ft. 6in. x 1ft. 10in. x 6ft. 11in.)
WARRANTY	3 years

FEATURES

ROLL HOLDER FOR GLIDE BEAM	Included
SIDE POCKETS	Included
CASTERS	Included
CWT LIGHT, ILLUMINATED WORKTABLE	Option
CWT LIFT, ELECTRONIC WORK HEIGHT ADJUSTMENT	Option
ROLL HOLDER FOR BED END	Option
PRO SHAFT 1700***	Option
CWT CUT, LONG SIDE****	Option
CWT CUT, SHORT SIDE****	Option
SILENT COMPRESSOR	Option
COMPRESSOR SHELF FOR 1700 SERIES	Option
CUTTER BENCH FOR 1700 SERIES*****	Option
ROLL CRADLE 450, ROLL HOLDER FOR TABLE TOP	Option
LOWER ROLL HOLDER	Option

- Select 1 of 4 fixed heights at installation
 Only applicable when including CWT Light or CWT Lift.
- Tensioning shaft with brake and flange guide for the glide beam media holder.
 Brackets for Linear Cutter, available in two versions and are sold separately for the long side and short side.
- ***** A bracket that fits a wide range of cutters and slitters, such as the Inglet InBest Pro Cutter Bar™, and KeenCut Evolution2 and Evolution3™ SmartFold.