

Daily Care

Make sure to wear the attached goggles and gloves when you work.


With a view to using this machine in a better condition, please be sure to follow the daily care at the end of the daily work. For details, please refer to the "Operation Manual Chapter 5 Maintenance" and "Request for Care and Maintenance".

Tools required for maintenance	• Maintenance washing liquid kit (SPC-0569)
	• Goggles (in the printer as an accessory)
	• Gloves (in the kit of cleaning solution for maintenance)
	• Dry cloth (Clean cotton with no fluff)
	• Swab (in the kit of cleaning solution for maintenance)
	• Clean stick for head periphery (in the kit of cleaning solution for maintenance)

1. Performing head maintenance

Perform [HEAD MAINTENANCE] to clean up the carriage and station surrounding area.


- (1) Press the [FUNC1](MENU) key in local.
- (2) Select [MAINTENANCE] and press the [ENTER] key.
- (3) Select [HEAD MAINTENANCE] and press the [ENTER] key.
- (4) Select [CARRIAGE OUT] and press the [ENTER] key.
- (5) Open the maintenance cover.

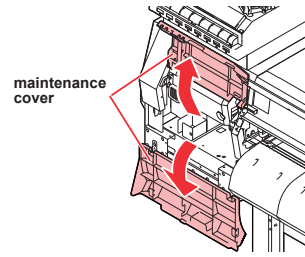

2. Cleaning head surrounding area

Remove ink on the head surrounding area and the carriage bottom with a cleaning stick dampened with cleaning liquid.

Clean the side of the head with a cleaning stick.

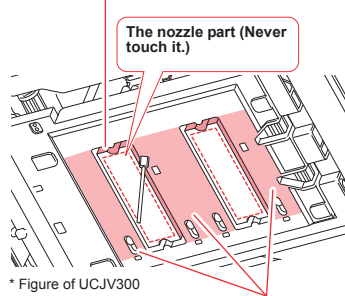


* Figure of UCJV300

Clean the carriage bottom with a cleaning stick.

Important! • DO NOT touch the nozzles during the cleaning.

3. Cleaning the cap

Remove ink on the rubber on the cap with a cleaning stick dampened with cleaning liquid.

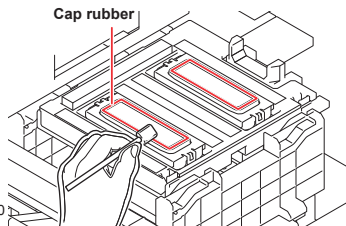

* Figure of UCJV300




Important! • If dried ink or contaminants adhered to the cap, the nozzle surface cannot be closed firmly. As a result, the nozzle surface is dried and the nozzle clogging may not be eliminated even after the cleaning.

4. Cleaning the wiper

Remove ink on the wiper and bracket with a cleaning stick dampened with cleaning liquid.


Pinch the nubs on both edges and slide out the wiper.

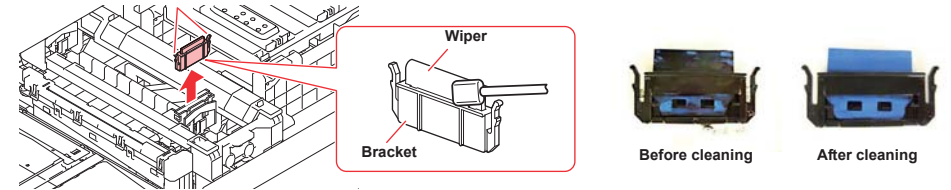


Important! • If you keep using filthy wiper with dried ink on it, dried ink particles may enter into the nozzles and causing nozzle clogging.

5. Cleaning the wiper cleaner

- (1) Wipe off the ink sticking to the wiper cleaner with a clean stick dampened in cleaning solution for maintenance.
- (2) If ink is accumulated in the ink pad case, use water-absorbing paper etc. to absorb it.

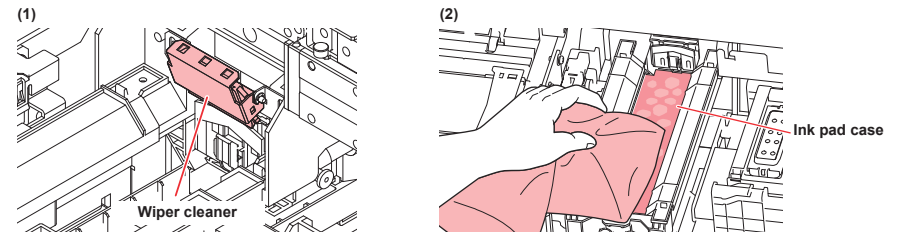


- Do not remove the wiper cleaner from the bracket.
- Clean only the surface of the wiper on the wiper cleaner. (It is not necessary to clean the rear side.)
- Do not remove the ink pad from the ink pad case.
- After cleaning the wiper cleaner, make sure that the cleaner is not facing up.

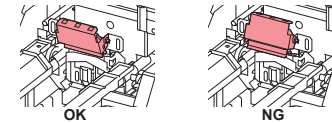

6. Cleaning media press

Wipe off debris from cutting or dust on the media press with a dry cloth or a cotton swab.

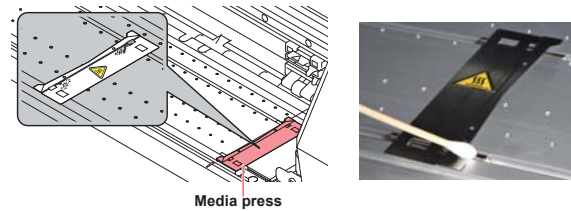

7. Finishing maintenance

Once all the cleaning is finished, close the head maintenance cover and the maintenance cover, and then press the [ENTER] key.